www.lifenetsd.com

### **Ruíjie** | Reyce

# RG-EW3200GX PRO 3200Mbps Dual-band Wi-Fi 6 Mesh Route

DATASHEET



### Highlights

- Next-Gen Gigabit Wi-Fi 6 Standard
- 4x4 Enterprise-level Chipset, better stability under heavy load
- 8 Antennas and 8 Signal Amplifiers, provide whole-home network coverage
- Exclusive Reyee Mesh solution, one click to mesh up multiple Reyee Mesh devices
- Take control of your home network at your fingertips

# Highlight Features



### Time forWiFi **Ó**, Time for RG-EW3200GX PRO

RG-EW3200GX PRO, the **Red Dot Design** Award 2021 winner. All-round upgrade of Wi-Fi performance, supported by **Tolly** certificate. Get your home ready for the Next-Gen Gigabit Wi-Fi 6!

3200M

Dual-band



<sub>rts</sub> | \_\_\_\_

802.11ax



### Supported by 4x4 Enterprise Level Chips Enjoy Better Stability under Heavy Load

Tolly proofs that EW3200GX PRO demonstrates more stable network performance at multiple connections.




# Highlight Features

### **Concurrently Support Multiple Devices Connection**

MU-MIMO together with OFDMA technology significantly improve network performance for multiple terminals



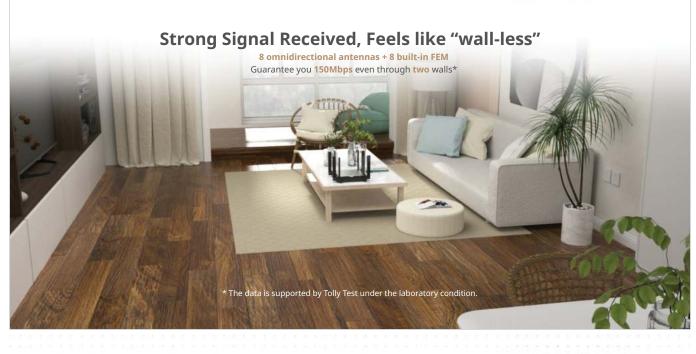

## Highlight Features

# <section-header> Packet Speed, Cach't Wat Burber with With Bit Berbinology like OFDMA, 1024 OAM, and the to 2000G PRO reaches ultra fast speed 2000G PRO reaches ultra fast spee







Basic	
Dimensions (W×D×H)	190 mm x 190 mm x 41 mm (7.48 in. × 7.48 in. × 1.61 in. antennas not included)
Weight	0.8 kg (packages not included)
Wi-Fi Standards	Wi-Fi 6 (802.11ax)
MIMO	2.4 GHz, 4×4, MU-MIMO 5 GHz, 4×4, MU-MIMO
Max. Wi-Fi Speed	2.4 GHz: 800 Mbps 5 GHz: 2402 Mbps
Channel Width	2.4 GHz: Auto/20/40 MHz 5 GHz: Auto/20/40/80 MHz
Antennas	8
Antennas Type	External Omnidirectional
Antenna Gain	2.4 GHz: 5 dBi 5 GHz: 6 dBi
WAN Port	1×10/100/1000 Base-T Port
LAN Ports	4×10/100/1000 Base-T Ports
Recommended Users	60
Max. Users	192
Power Supply	DC 12V/2.5A
Power Consumption	≤36W
Operation Frequency Bands	802.11b/g/n: 2.400 GHz to 2.483 GHz 802.11a/n/ac/ax: 5.150 GHz to 5.350 GHz 802.11a/n/ac/ax: 5.470 GHz to 5.725 GHz , 5.725 GHz to 5.850 GHz country-specific restrictions apply
DFS	$\checkmark$
Transmit Power	Regular: CE EIRP: ≤20 dBm (2.4 GHz) ≤27 dBm (5 GHz)
Operating Temperature	-10 °C to +45 °C (14 °F to 113 °F)
Operating Humidity	5% to 95% Noncondensing
Certifications	CE,RoHS



	Wireless
OFDMA	$\checkmark$
MU-MIMO	$\checkmark$
BSS Coloring	$\checkmark$
Maximum Number of SSIDs	6
SSID Hiding	$\checkmark$
Band Steering	$\checkmark$
Guest Wi-Fi	$\checkmark$
WPA/WPA2	$\checkmark$
WPA3	-
Roaming	Layer 2 Roaming
Blacklist	$\checkmark$
Reyee Mesh	$\checkmark$
Mesh Pairing by Hardware	$\checkmark$
Mesh Pairing by Mesh Button	$\checkmark$
Mesh Pairing by Eweb	$\checkmark$
Recommended Hop Count	≤5
Wi-Fi Optimization	$\checkmark$
QoS (WMM)	$\checkmark$
WPS	-
Transmission Power Adjustment	$\checkmark$
Hardware	
CPU	MT7622
Flash	16 MB



Hardware	
RAM/SDRAM	256 MB
Color	Black
System LED Indicator	$\checkmark$
Reyee Mesh LED Indicator	$\checkmark$
Reyee Mesh Button	$\checkmark$
Power Button	-
Reset Button	$\checkmark$

DC Connector Dimensions

5.5 mm x 2.1 mm x 11.5 mm (0.22 in. × 0.08 in. × 0.45 in. antennas not included)

WAN	
Static IP	$\checkmark$
DHCP	$\checkmark$
PPPoE	$\checkmark$
Learning PPPoE Account & Password	$\checkmark$
VLAN Tagging	$\checkmark$
LAN	
DHCP Server	$\checkmark$
Client List	$\checkmark$
Static IP Assignment	$\checkmark$
Port-Based Flow Control	$\checkmark$

Features	
TR069	$\checkmark$
IPv6	$\checkmark$
DDNS	$\checkmark$



	Features
IPTV	$\checkmark$
Alarm	$\checkmark$
Diagnosis	$\checkmark$
UPnP	$\checkmark$
ARP Binding	$\checkmark$
Port Mapping	$\checkmark$
DMZ Host	$\checkmark$
Rate Limitation of Terminals	$\checkmark$
Hardware Acceleration	$\checkmark$
MAC Address Cloning	$\checkmark$
Cloud Management	$\checkmark$
Repeater Mode	$\checkmark$
WISP Mode	$\checkmark$
	Security
PPTP VPN Server	$\checkmark$
PPTP VPN Client	$\checkmark$
L2TP VPN Client	-
Parental Control	$\checkmark$
Protect TCP Flood Attacks	$\checkmark$
Protect ICMP Attacks	$\checkmark$
Protect UDP Flood Attacks	$\checkmark$
System	
Default Access/Password	192.168.110.1 No Password Required by Default



System	
URL Access	$\checkmark$
Local Upgrade	$\checkmark$
Online Upgrade	$\checkmark$
APP Upgrade	$\checkmark$
Syslog	-
Backup	$\checkmark$
Factory Reset	$\checkmark$

Package Contents

Model	RG-EW3200GX PRO
Wireless Router	1
Power Adapter	1
Quick Start Guide	1
Cat5E UTP Cable	1

# Rujje Reyce

Redefine your easy network

**Copyright** ©2000-2024 Ruijie Networks Co., Ltd. All rights reserved. No part of this document may be reproduced or transmitted in any form or any means without prior written consent of Ruijie Networks Co., Ltd.

### Notice

This content is applicable only to regions outside the China mainland. Ruijie Networks Co., Ltd. reserves the right to interpret this content.

The information contained herein is subject to change without notice. Nothing herein should be construed as constituting an additional warranty. Ruijie Networks Co., Ltd. shall not be liable for technical or editorial errors or omissions contained herein.



Ruijie Networks Co., Ltd. Website: https://reyee.ruijie.com/en-globa